


# NUVAIR STANDARD ELECTRIC

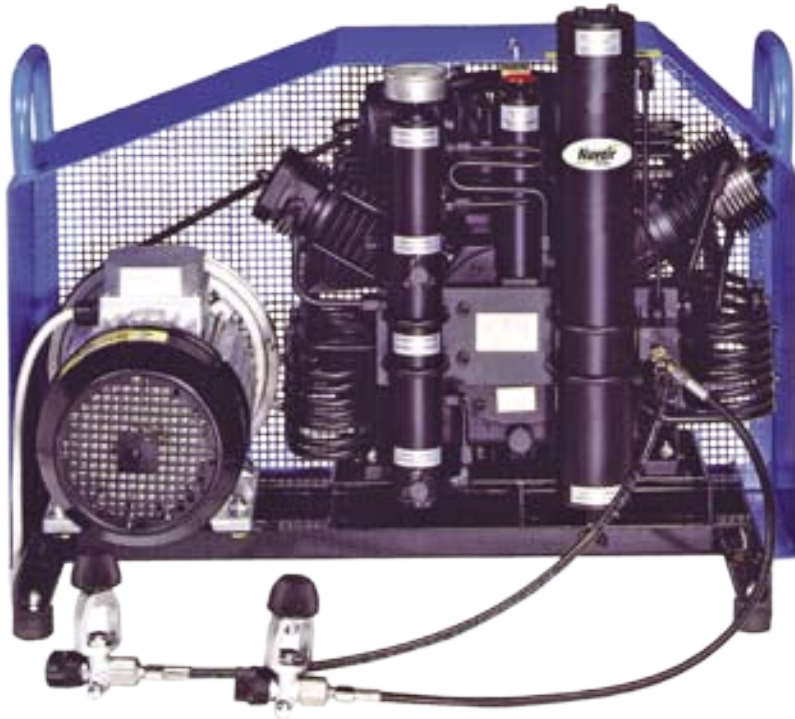

The Nuair Standard Electric uses a pumping unit that is made from top quality materials; connecting rods from aluminum alloy, stainless steel intercoolers and aftercoolers that are more than four meters in length, and cylinders of special cast iron. The electric motor uses an aluminum housing to keep weight to a minimum, making the station very compact.

	Model 5	Model 7	Model 9
Filling Time*	Approx. 11 min	Approx. 9 min	Approx. 7.5 min
Cubic Feet/Minute	4.7 FAD 6.6 SCFM	7.6 FAD 8.9 SCFM	9.4 FAD 10.8 SCFM
Liters/Minute	135	215	265
Engine	Single or Three Phase Electric	Single or Three Phase Electric	Single or Three Phase Electric
Options: E1 230V-50/60Hz	19 Amp (Model#8017)	25 Amp (Model#8020)	34 Amp (Model#8023)
E3 230V-50/60Hz	11 Amp (Model#8018)	14 Amp (Model#8019)	20 Amp (Model#8022)
E3 440V-50/60Hz	N/A	7 Amp (Model#8037)	10 Amp (Model#8038)
Engine Power	4 hp (3 kW)	5.5 hp (4 kW)	7.5 hp (5.5 kW)
Max. Op. Pressure	5000 PSI (345 bar)	5000 PSI (345 bar)	5000 PSI (345 bar)
RPM	890	1350	1550
Number of Stages	3	3	3
Number of Fill Hoses	2	2	2
Condensate Drain	Manual	Manual	Manual
Sound Level @ 3 Meters	75 dB	81 dB	82 dB
Dimensions (HxWxD)	25" x 34" x 18" (64 x 86 x 45 cm)	25" x 34" x 18" (64 x 86 x 45 cm)	25" x 34" x 18" (64 x 86 x 45 cm)
Weight	218 lbs (99 kg)	218 lbs (99 kg)	240 lbs (109 kg)
Lubrication	Splash lubrication, capacity 1.6 qts.		
Air Quality	DIN 3188/CGA Grade E		

\*Single 80 cu ft cylinder from 500 to 3000 PSI

**Nuair™**  
 2949 West Fifth Street Oxnard, CA 93030  
 Office: 1-805-815-4044 Fax: 1-805-815-4196  
[www.nuair.com](http://www.nuair.com)

Terms and Conditions:  
 50% Deposit at time of order. Balance due prior to shipping.  
 FOB Oxnard, CA USA. Specifications and price subject to  
 change without notice.