

NUVAIR R15 > R30

- Complete state-of-the-art LP/LP nitrox generating system
- Compressors can be used independently to provide low pressure air or together, to provide nitrox.
- Latest membrane technology. *Now up to 20% more efficient.*
- Produces a constant flow of nitrox from 22% to 40% O₂ at 16 scfm at 150 PSI

Specifications

- LP Air Filtration: Norgren Series 74
 - Auto Drain/Dp Gauges
 - Coalescing 1.0 micron
 - Fine Polishing .01 micron
 - Oil Vapor Removal .003 PPM
- Supplying Grade D Air
- Champion R30 - rated to 50cfm@175psi
- Champion R15 - rated to 23cfm@175psi
- LP Dual Control Head unloaders
- (2) Air After Coolers
- Air Tank - (2) Stainless Steel @ 9 gallons
- Fuel - 6.5 gallons
- Weight 1150 lbs.
- H 70" x W 82" x D 38"
- Honda 24hp Electric Start Engine
- 12 Volt Battery with Box
- 20 Amp Charging System
- 600 Watt Inverter

Nitrox Membrane System

- (2) Pro O₂ Analyzers, one with inline sensor
- Membrane rated up to 20cfm @ 40% O₂
- Auto Thermostatic control 110/220 volt heater
- Air Intake Filter & Static Mixing Tube




- Synthetic Food-grade Compressor Lubricant for nitrox breathing applications
- Mix Accurate to Within 1/10th %

Features

- Rigid 2" Sq. Aluminum Frame & Belt Guard
- Stainless Steel ¼" Compressor Mounting Plate
- Vibration Mounts below Compressor Plate & Frame
- Produce LP Air @ 36cfm 175psi or Nitrox at 16cfm 22-40% O₂ 175 psi

Options

- 27 hp Duetz Diesel or Electric 15hp 3 phase Motor
- 60 Gallon Volume Tank
- Pressure Lubricated Compressor rated to 250psi
- Hour Meter/Tachometer
- Low Oil Shut Down
- High Temperature Shut Down
- Low/High O₂% Shut Down or Alarm
- Additional Diver LP Filtration

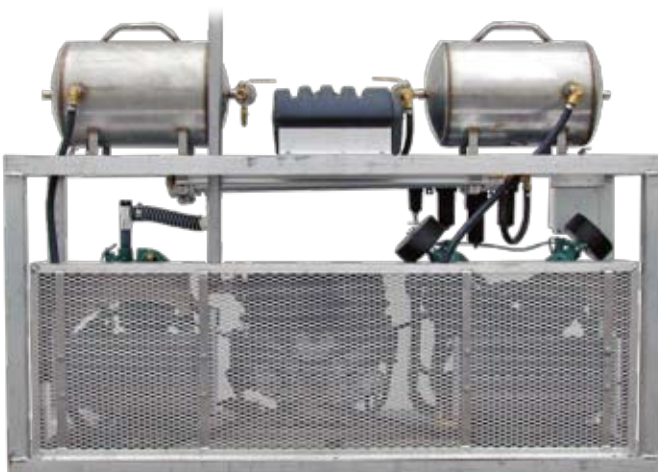

Nuvair™

2949 West Fifth Street Oxnard, CA 93030
Office: 1-805-815-4044 Fax: 1-805-815-4196
www.nuvair.com

Terms and Conditions:

50% Deposit at time of order. Balance due prior to shipping. FOB Oxnard, CA USA. Specifications and price subject to change without notice.