



FEATURES

Compressor

- 4 cylinder, 4-stage, air-cooled
- Interstate pressure gauges
- (2) Large interstage condensate separators
- Large stainless steel interstage cooling tubes
- Low pressure oil pump with filter
- Oil level sight gauge and oil pressure gauge
- Automatic condensate drains
- Low oil shutdown switch
- High temperature switch
- SEP-15 high pressure moisture separator
- Dual filter filtration (60,000 cu ft)
- Visual CO / moisture indicator
- Aluminum frame with stainless steel comp plate
- Vibration isolation frame mounts
- EPA certified 13-gallon fuel tank

Engine

- Honda gas SKU: GX690RTXA2
- Hour meter
- Loadless start/idle control

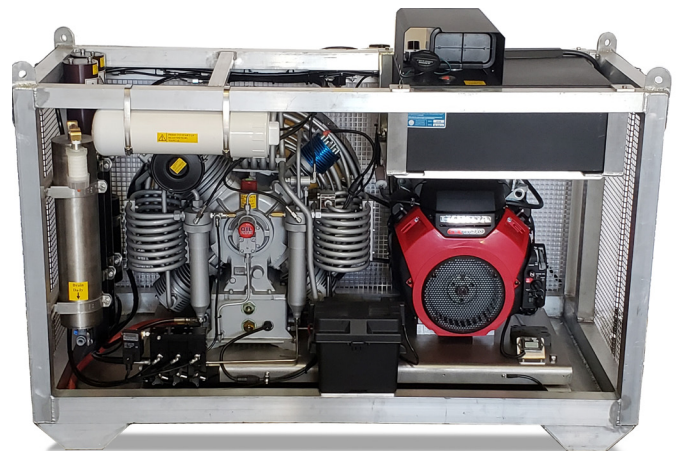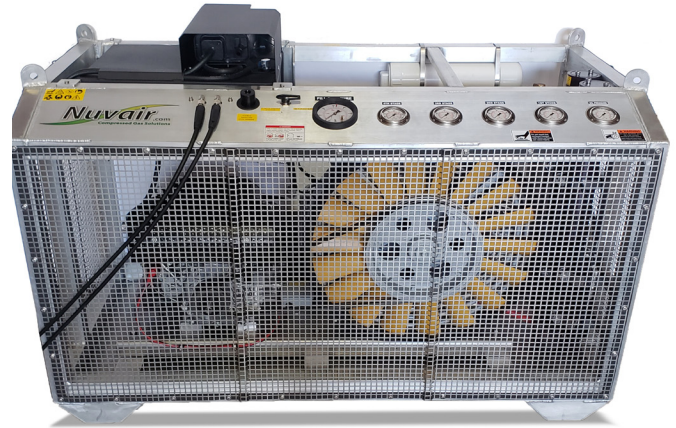

OPTIONS

- Certified lifting eyes
- Pro CO with audible alarm
- Diester based lubricant
- Moisture analyzer
- Filtration (90,000-120,000 cu ft)
- Upgrade to 6000 psi (414 bar)

SPECIFICATIONS

SKU: 8048-G

| | |
|------------------------|-------------------------------------|
| Fill Time* | ~ 3 minutes |
| Charging Rate* | 22 SCFM (623 L/min) |
| CFM FAD | 18 CFM (510 L/min) |
| Max Operating Pressure | 5000 psi (345 bar) |
| RPM | 1180 |
| Number of Stages | 4 |
| Oil Pressure | 5.8 to 58 psi (0.4 to 4 bar) |
| Air Quality | Grade E |
| Engine | Honda gas GX690RTXA2 22.1 hp |
| Dimensions (L x W x H) | 64 x 32 x 45 in (163 x 81 x 114 cm) |
| Weight | 750 lb (340 kg) |

*Based on 80 cu ft cylinder from 500 to 5000 psi.