


Popular with technical and rebreather divers, the Mini Sport Booster fills deco bottles, oxygen and diluent rebreather cylinders when low pressure compressed air is the only source of power available. The Haskel oil-free 4-inch drive Mini Sport Booster is an air driven, air cooled, non-lubricated, lightweight, O<sub>2</sub> clean, reciprocating piston, single stage system. The Mini Sport Booster is factory cleaned for oxygen service. The Mini Sport Booster has been designed and manufactured for the dive market, providing performance and reliability at an affordable price.

## FEATURES

- Charges gasses up to 3750 psig (259 bar)
- Inlet gas pressures as low as 100 psig (6.89 bar)
- Lightweight portability
- Locking speed control muffler
- Relief valve for integrated air drive protection
- Integrated cooling jacket and distance piece for extended seal life and total O<sub>2</sub> separation

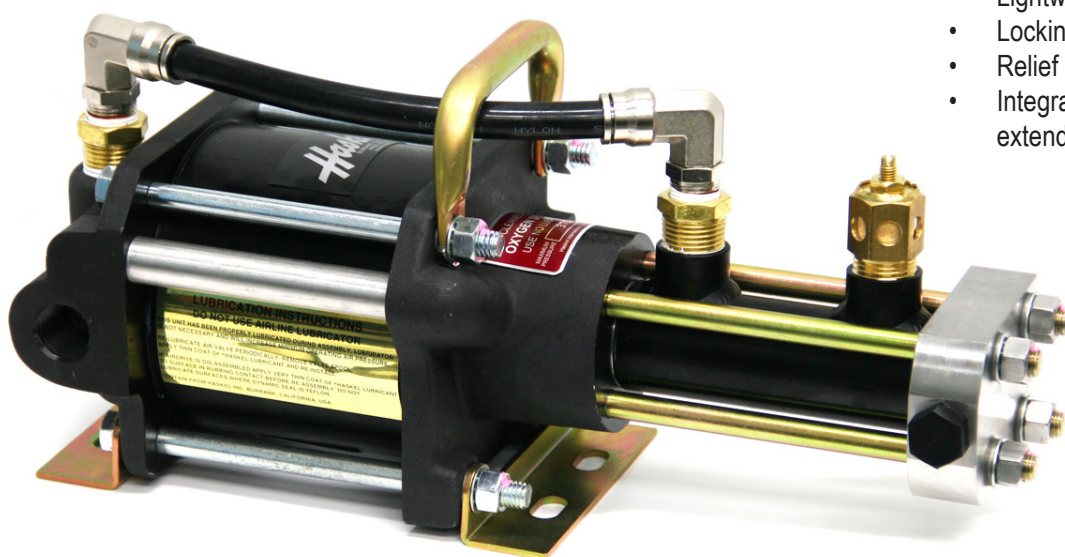

## SPECIFICATIONS\*

SKU: MSB9000

Drive	4 in (10 cm)
Ratio	25:1
Weight	12 lbs (5.4 kg)
Max Rated Inlet Pressure	4500 psi (310 bar)
Max Rated Outlet Pressure	4500 psi (310 bar)
Volume per Cycle	1.232 cu in (0.202 L)
Max Inert Gas Pressure	4500 psi (310 bar)
Max O <sub>2</sub> Pressure Output	3750 psi (259 bar)
Min Gas Supply Pressure	100 psi (6.89 bar)

## FILL TIMES\*

Fill Target Pressure	2400	3000
Gas Supply Pressure (psi)	Pump up time after equalization fo 19 cu ft tank (min:sec)	
500	4:31	6:00
1000	1:44	3:00
1500	0:33	1:31
2000	0:12	1:00
2400	0:00	0:32

\*Gas supply from a single 80 cu ft bottle.