





MCH 36 Electric Package

MCH 36 with Electric Motor

After considerable research, development and testing Nuvair is proud to release a 26 SCFM charging rate compressor, rated for continuous duty at up to 6000psi. Unsurpassed in quality, reliability and price.

The frame is made with 6061 aluminum and has an enclosed bottom, lifting eyes, and fork lift slots. All equipment is inset; compressor and motor have independent vibration absorption mounts and are mounted on a steel plate.

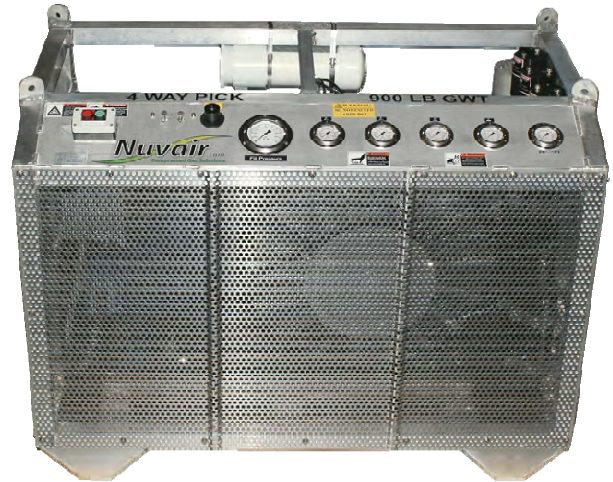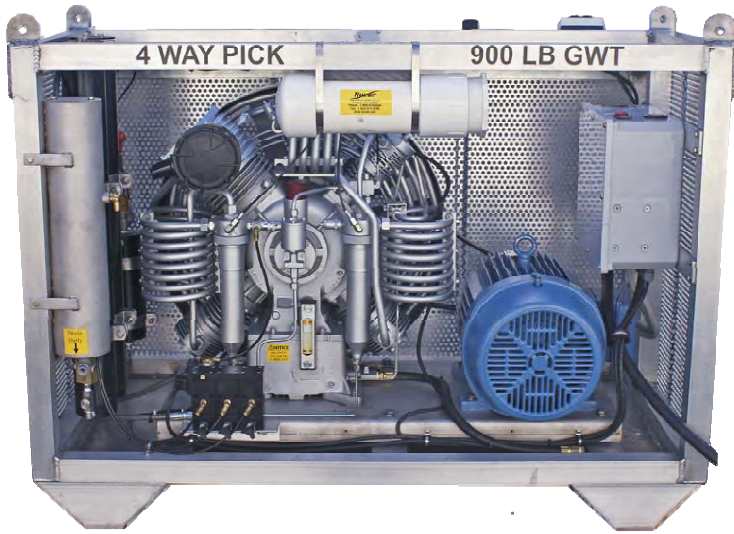

Standard Features

- Charging rate 26.4 SCFM (752 l/m) compressor*
- 4 cylinder, 4 stage, air cooled, Air Cooled
- Visual CO/Moisture Indicator
- Hour Meter
- Interstage Pressure Gauges
- 3 Large Condensate Separators
- Large SS Interstage Cooling Tubes
- Low Pressure Oil Pump with Filter, Oil Level Sight Gauge and Oil Pressure Gauge
- Automatic Condensate Drains
- Loadless Start
- Low Oil Shutdown Switch
- High Temp Switch set at 350°F
- Dual Filter Filtration (60,000 Cu. Ft.)
- Nema 4 Enclosed Electric Box
- Aluminum Frame: with enclosed bottom, Belt Guard, lifting eyes, and Fork Lift Slots

*based off filling a 80 cu ft. tank 500 to 3000psi

Specifications

- L 56" x W 30" x H 42"
- Weight - 845 Lbs.
- 26.4 SCFM / F.A.D.- 22CFM

Options

- Stainless Steel Package
- Steel Frame
- Powder Coat Blue Paint
- Dial A Pressure Shutdown
- Auto Pressure Shutdown
- Presec Electronic Moisture Monitor
- Upgraded Filtration to
- Remote Fill Panel
- Frame Mounted with Storage tanks below for Paintball use
- Digital CO Monitor
- Certified Lifting Eyes & Doc. Tube

info@nuvair.com

www.nuvair.com

Phone: 1-805-815-4044 Fax: 1-805-815-4196
2949 West 5th Street Oxnard, Ca 93030 USA